



StickApp & StickApp Plus



Add value to your reject boards!



Add value to your reject boards with the regularising saw Brødbæk StickApp & StickApp Plus

Board length	: 800 - 1250 mm (1900 mm)
Board width	: 75 – 150 mm
Board thickness	: 15 – 30 mm
Max. feed speed	: 40 m/min.
Max. capacity	: 22 boards/min. (length 1250 mm)
Reduction of board thickness	: 0 – 6 mm

The standard line Brødbæk StickApp features:

- Magazine for a stack of random width boards
- Infeed chain with steel dogs for positive feeding
- Vertical saw for setting up blades for cutting boards or sticks depending on spacers between the blades. Driven by 45 kW motor and V-belt drive
- 2 outfeed rollers driven by gear motor
- Pneumatic operated idle top pressure roll
- Belt conveyor for finished boards and sticks, means higher capacity.

OPTION

The extended version Brødbæk StickApp Plus also includes:

- Horizontal saw 30 kW with saw bush for setting up 1 blade for calibration of board thickness
- Thickness can be adjusted by changing spacer.

Common features:

- One steel frame for easy flexible installation
- Variable feed speed, frequency controlled
- Mechanical & electric safety features
- **“Wired, tested & ready to go!”**


Enquire regarding your specific requirements –
Brødbæk & Co. will provide a specialized yet
modular solution.




Infeed magazine for a stack of random width boards. At the bottom is the in-feed chain with steel dogs, for a positive feeding of even wet boards.



To the left is the StickApp Plus unit with a horizontal saw bush for calibrating the thickness of boards and sticks.

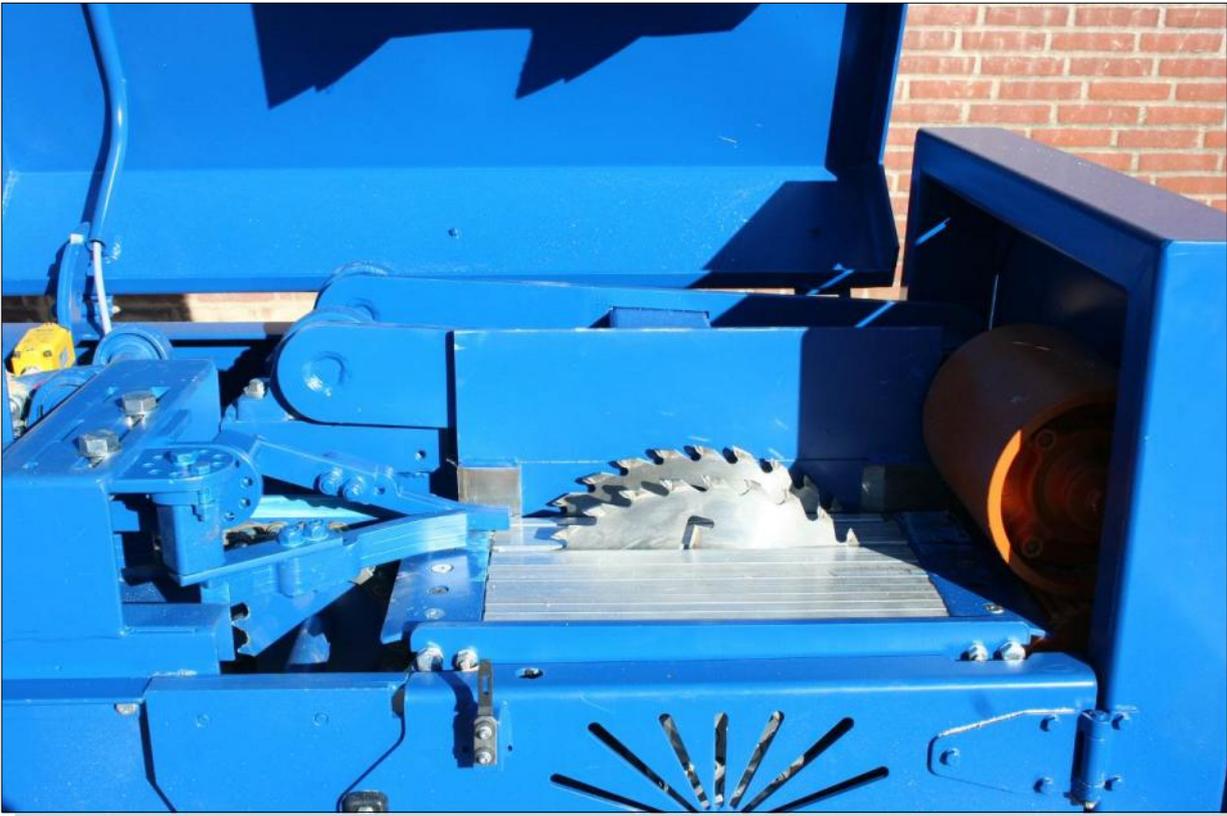

The basic Stick App unit with a vertical saw for cutting boards and sticks.

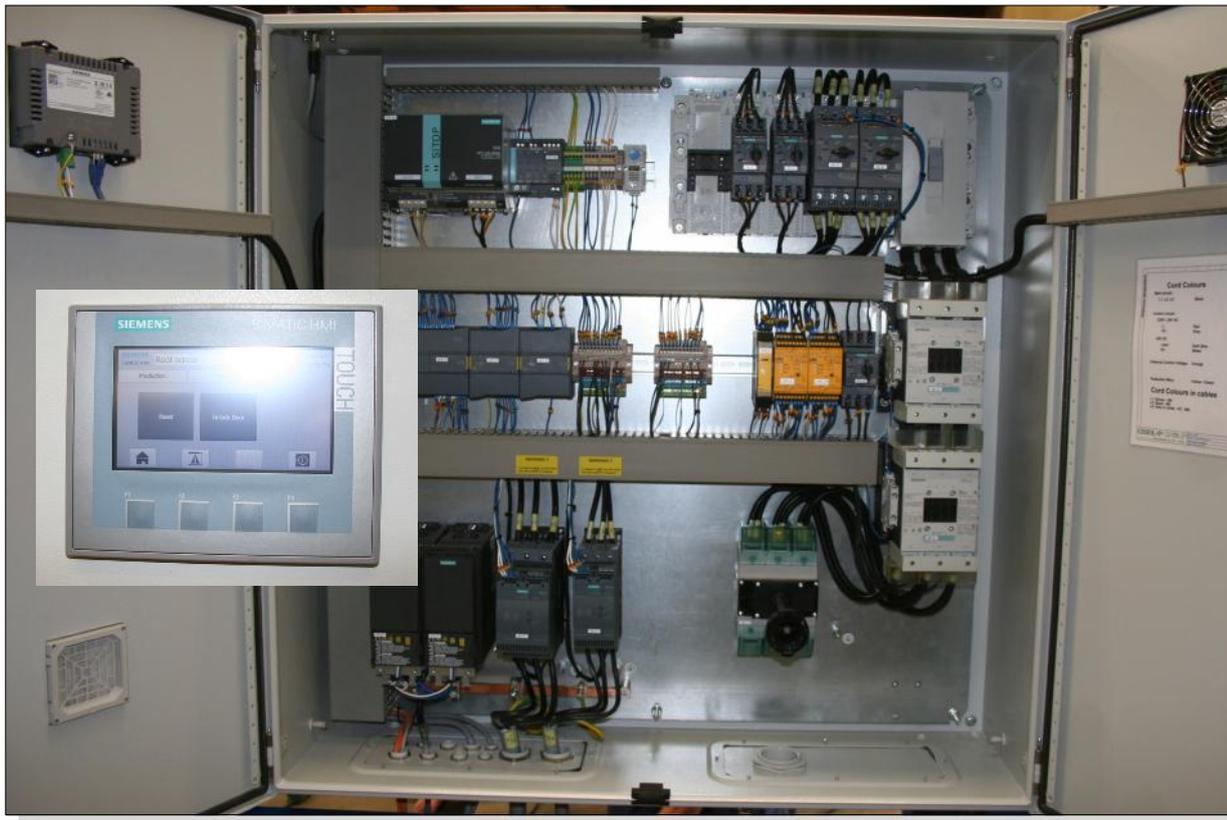

The control cabinet. Insert : The HMI-unit.

Brødbæk & Co. A/S
Mølgårdvej 1
DK-7173 Vonge
Denmark

☎ : +45 7580 3599
Fax : +45 7580 3581
E-mail : sales@brodbaek.dk
Website : www.brodbaek.dk

Representative :