



# POST POINTING with Brødbæk & Co.



*Added value - for your timber*



## Post Pointing with Brødbæk & Co.

The post pointing line can ideally be integrated in a stacking line

Max. timber dimensions : 200 x 200 mm


Max. cutting depth : 175 mm

Max. cutting angle : 20°


The standard line is featuring:

- 4 post pointing saw units 11 kW each &  $\varnothing$  650 mm saw blade
- 4 pneumatically actuated post turning units
- 4 pneumatically operated top pressure units for safe and accurate post pointing
- Weather top saw unit
- Hydraulic rise & fall of the entire pointing unit to swing in and out of action.
- Capacity: 16-20 pcs. /min. depending on actual dimensions.

Enquire regarding your specific requirements –  
Brødbæk & Co. will provide a specialized yet  
modular solution.

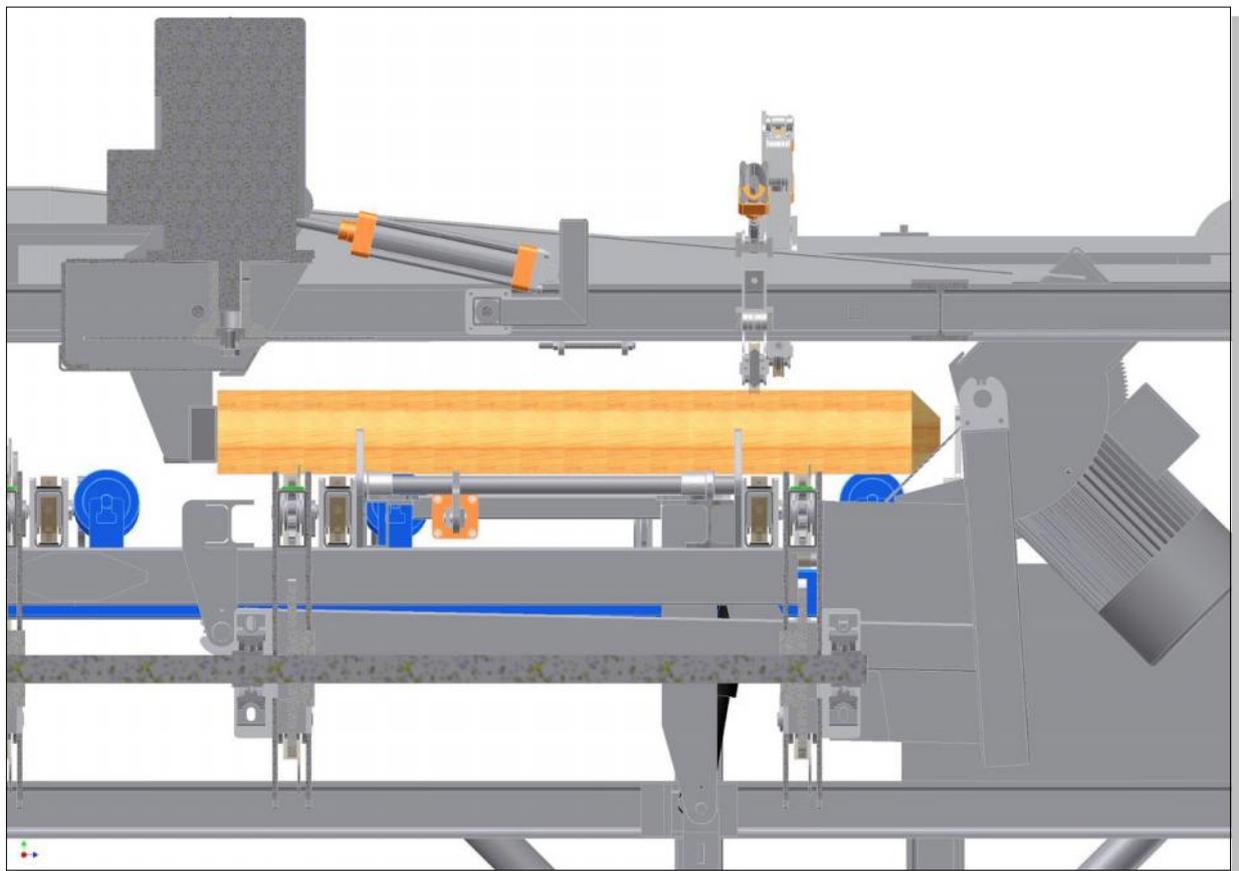

Example shown is 175 x 175 mm diamond topped at 45°

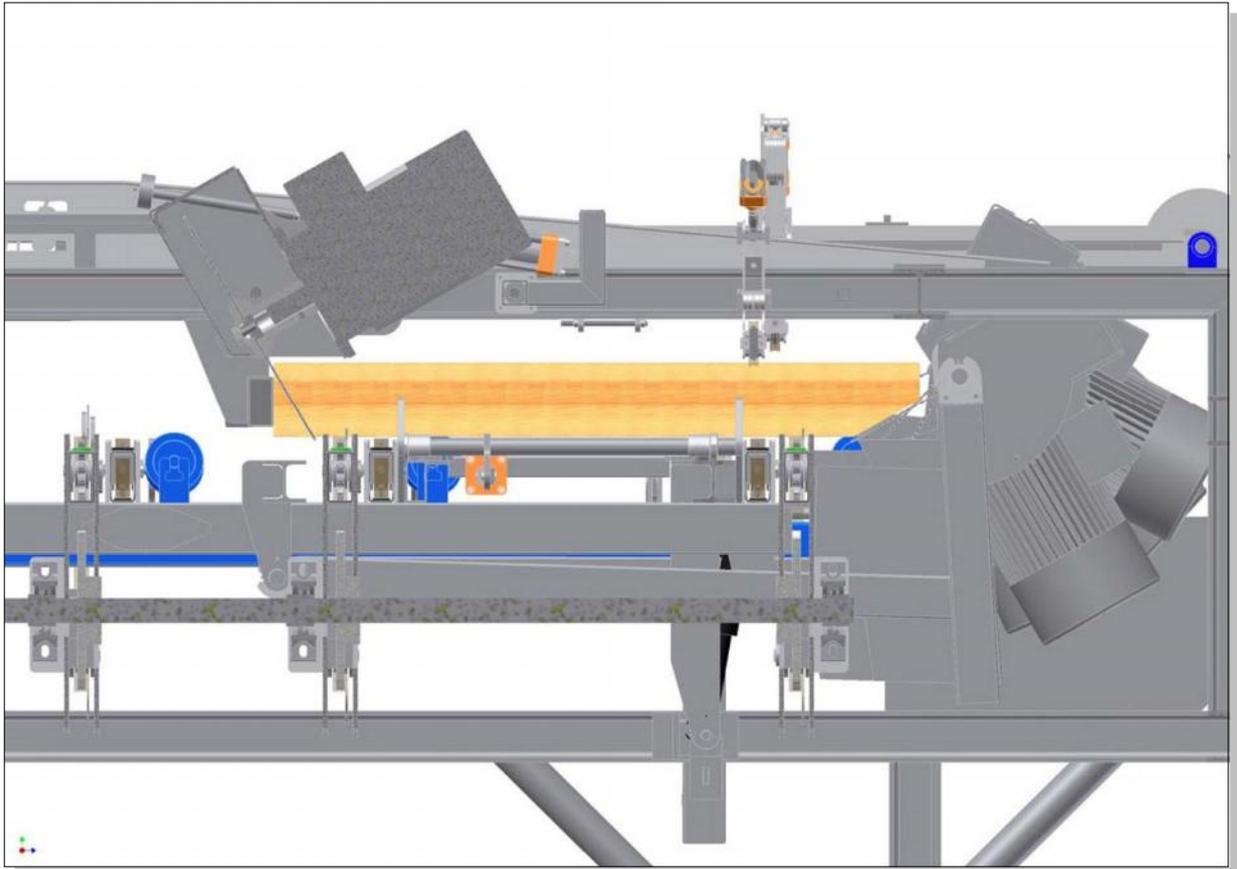

Example shown is 175 x 175 mm post pointed at 30° and weather topped at 30°



Diamond topping of 175 x 175 mm posts



The weather top saw unit in action



Finished pack of timber with added value

Brødbæk & Co. A/S  
Mølgårdvej 1  
DK-7173 Vonge  
Denmark

☎ : +45 7580 3599  
Fax : +45 7580 3581  
E-mail : sales@brodbaek.dk  
Website : www.brodbaek.dk

Representative :