

# SANDING TABLE

Type AS 2000



- *Low-noise workspace adapted to environment*
- *Dustless working room*
- *Automatic filter cleaning system*
- *Cheap and easy to operate and to maintain*
- *No air or heat loss*

The Aagaard sanding table is ideally suited for sanding of all types of parts. The sanding table can be installed anywhere and does not require connection to an extraction system as the table is fitted with an internal fan with explosion-proof motor. The outfeeding of the chips takes place through a wooden grille at the top and the chips are filtered through internal, easily replaceable special filters. The air is filtered and re-cycled to the factory through a grille at the back. The dust is collected in pans running on wheels for easy removal and emptying. The sanding table is fitted with internal shaking for simple and quick cleaning of the filter elements.

**Quality - Know-how - Service**  
Aagaard A/S design, manufacture and install all types of pollution control systems and finishing lines for the woodworking industry. If you would like additional information, advice or a quotation, please contact us. Remember, our know-how is at your service.

**AAGAARD**




**FINNROSE**

**AAGAARD A/S**

A/S reg. no. 249916  
Smedevænget 14 . DK-9560 Hadsund  
Phone +45 96 531 200  
Telefax +45 98 57 42 15  
mail@aagaard-systems.dk  
www.aagaard-systems.com

# TECHNICAL DATA

## Sanding Table type AS 2000

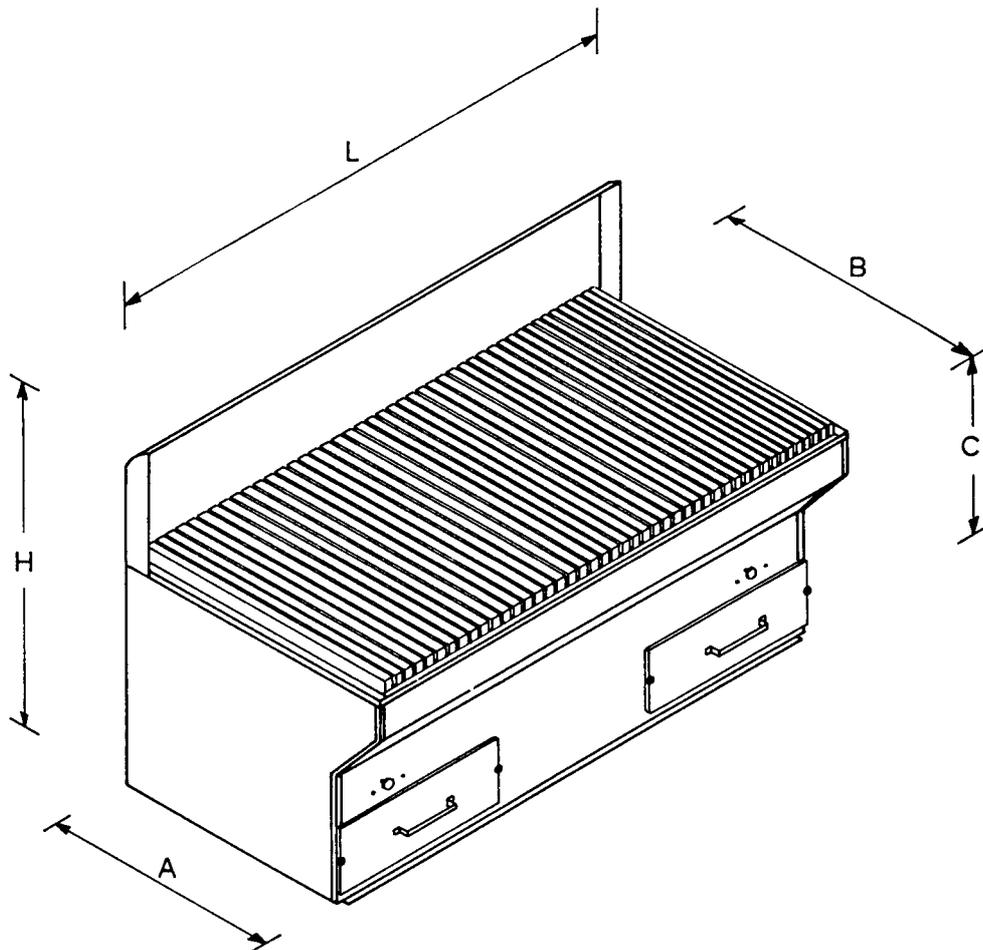

Type	A	B	C	L	H	Part No.
AS 2000	900	1100	900	2020	1300	201000

TYPE AS 2000	
Quantity of air	4,600 m <sup>3</sup> /h
Noise level	60 dB(A)
Filter type	F 50 SL - 1/4 - EU5
Filter surface	5.6 m <sup>2</sup>
Fireproofing class	F1
Fan Belt pulley	DA 12/9 SPA 112 - ø25 TP
Motor Belt pulley	EEXE 2.2 kW - 1,400 r.p.m. SPA 71 - ø28 TP
V-belt	SPA 1180

We reserve the right to change the design without notice.